


INLET PROTECTION - IP

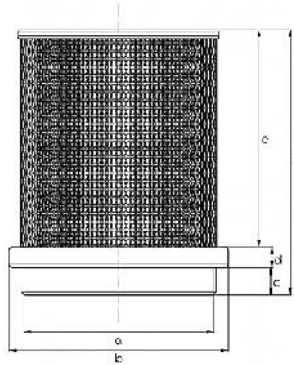


Steel mesh nylon threaded apart

DIMENSIONS (IP)

Type	a	b	c	d	e	f	CAPACITY m ³ /h	WEIGHT kg
IP 5	1" 1/2	56	11	8	64	83	1200	0,05
IP 6	2"	68	13	8	78	99	1200	0,07
IP 8	3"	100	15	9	115	139	2000	0,19
IP 9	4"	127	16	12	125	153	2000	0,28


CHECK VALVE - VC

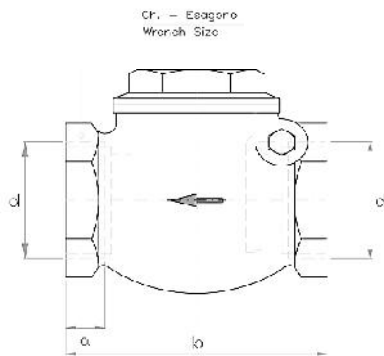

DIMENSIONS (VC)

Type	Dn	d	a	b	Ch.- Esagono	WEIGHT kg
VC 1	1/2"	1/2"	8	47	25	0,15
VC 2	3/4"	3/4"	8	52	32	0,20
VC 3	1"	1"	10	62	38	0,30
VC 4	1" 1/4	1" 1/4	10	74	47	0,40
VC 5	1" 1/2	1" 1/2	10	86	55	0,80
VC 6	2"	2"	12	97	67	1,00
VC 8	3"	3"	12	133	95	2,30
VC 9	4"	4"	20	180	124	5,10
VC 10	5"	5"	22	206	150	10,55

PRESSURE/VACUUM GAUGE - MC / MV

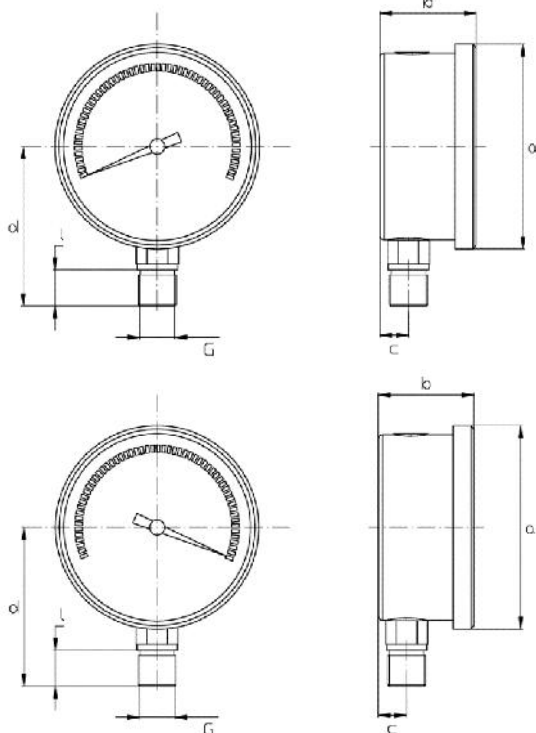

DIMENSIONS (MC/MV)

Type	G	a	b	c	d	l	WEIGHT kg
MC 010	1/4"	63	36	11	50	13	0,18
MC 020	1/4"	63	36	11	50	13	0,18

Mod	Δp	PRECISION
MC 010	0 ÷ 600 mbar	1,6%
MC 020	0 ÷ 1000 mbar	1,6%

Type	G	a	b	c	d	l	WEIGHT kg
MV 010	1/4"	63	36	11	50	13	0,18

Mod	Δp	PRECISION
MV 010	600 ÷ 0 mbar	1,6%

Dimensions in mm - FOR REFERENCE ONLY