


STAR FILTER INSTALLATION

EUROVAC STAR FILTER

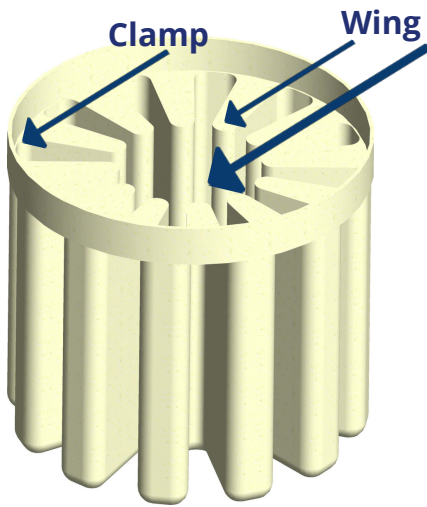

Installation of the shaker bar:

- Slide the shaker rod into the filter, taking into account the number of wings in the filter (16 or 20).
- The shaker rod has six wings; place them between the filter wings.
If the filter has 16 wings, divide the wings as follows: 4/2/2/4/2/2.
If the filter has 20 wings, divide them as follows: 4/2/4/4/4/2/4.
- Ensure that the shaker rod passes between the wings inside the filter and place it in position, ensuring a smooth and stable installation.


Attaching the filter:

- Attach the filter to the shaker rod from the bottom inside the filter using 6 zip ties. The attachment points are on each of the two wings.
- Carefully tighten the filter to the metal filter ring on the filter using the metal clamp on the filter. The clamp is located at the top under the stitching.

Note: Zip ties are included in the package for attachment.

Image above the filter.

Figure: example of a 20-wing filter, distribution diagram: 4/2/4/4/2/2/4.

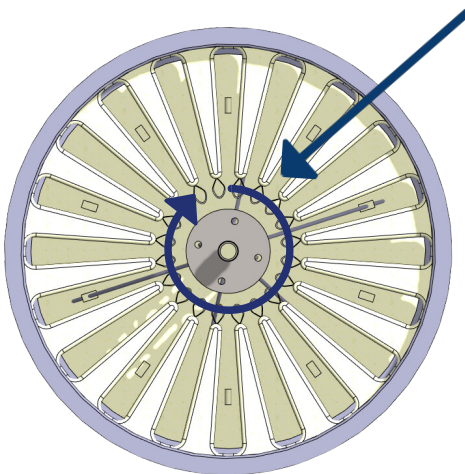

COMPRESSED AIR CLEANER FILTER REPLACEMENT INSTRUCTIONS

Note: This additional step only applies to vacuum cleaners with compressed air cleaning.

- If the vacuum cleaner is equipped with a compressed air filter cleaning system, follow the separate instructions for additional filter attachment from the top.
- Thread a large zip tie through the links on the top of the filter and tighten it securely around the shaker rod.
- The shaker rod has two rings; install 2 zip ties in the links without tightening them all the way. Slip the large zip tie through the smaller ones and tighten. The smaller zip ties can then be tightened. Cut off the excess.
- Tighten the zip ties firmly to ensure a secure fit.

Note: Check that all parts are properly installed before using the vacuum cleaner.